




## NEROLAC BEAUTY GOLD WASHABLE

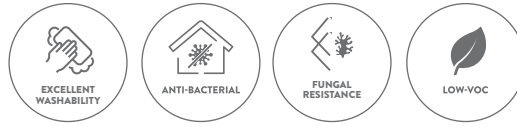

### PRODUCT DESCRIPTION

KNP Nerolac Beauty Gold Washable has a rich sheen finish with excellent stain-cleanability at an affordable price. It maintains its fresh look for years. It is a well-balanced product with good Anti-Bacterial & Anti-Fungal properties and good elongation that takes care of any hairline cracks.

### PERFORMANCE FEATURES & BENEFITS



### SURFACE PREPARATION

1. Ensure that the plastered surface is clean, dry & free from any loose or poorly-adhering material, dirt, grease etc.
2. Apply a coat of Nerolac Premium or Popular Primer (Water Thinnable / Solvent Thinnable) and allow it to dry.
3. Apply the Nerolac Wall/Cement Putty (wherever required) to level-out the undulations. Sand the surface with emery paper no. 180 and wipe it clean.
4. Apply another coat of Nerolac Premium or Popular Primer (Water Thinnable / Solvent Thinnable) and allow it to dry. Sand the surface with emery paper no. 320 and wipe it clean with a cloth before painting.
5. Dry minimum 8 h for solvent thinnable primer & minimum 4-6 h for water thinnable Primer.

### RECOMMENDED USAGE

Nerolac Beauty Gold Washable is designed for application on new, as well as the previously painted interior surfaces such as plaster, brickwork, cement renderings, concrete, hardboards etc.

### APPLICATION

1. Dilute 1 L of paint with a maximum of 500-600 ml of clean water. Apply 2 to 3 coats with an interval of 3-4 h by brush or roller, depending on the ambient conditions.
2. Dark shades may require additional coats for hiding.

### PRECAUTIONS

1. Refer to the MSDS for "Nerolac Beauty Gold Washable" for safety measures & precautions.
2. Store in well-ambient conditions, ventilated locations & away from any source of ignition and fire.
3. Keep it away from children.
4. In case of eye/skin contact, wash with plenty of water.
5. Inhalation/Injection will cause danger. In either case, get fresh air & consult medical practitioners.
6. Do not apply when the ambient temperature might drop to levels below 10°C within 4 h of application.
7. The new plaster should be allowed to cure for a minimum of 12 weeks.
8. Avoid extra-thinning.
9. Can be tinted with Nerolac Hi-Power Universal Stainer before thinning. Do not add more than 5% of Nerolac Hi-Power Universal Stainer. Stir the tinted paint well, after tinting & before application.
10. The container must be tightly closed when not in use. Stir well and strain before use.
11. Use safety equipments like rubber or polythene gloves, safety goggles/glasses & face masks.

## TECHNICAL DATA



\*\*\* Actual coverage may vary from the quoted coverage due to factors such as the application conditions, surface preparation and porosity.

## POST APPLICATION INSTRUCTIONS

For the best performance, ensure dry dust-cleaning at regular intervals. Allow a drying-time of 2 weeks for proper film-formation before doing any sponge cleaning with a mild soap-solution or mineral turpentine.

## STAIN-CLEANING INSTRUCTIONS

- The paint film needs at least a week after application, to be set & ready for the stain-removal.
- Wipe gently. Do not use liquid bleach.
- For light stains like mud, pencil, tea, coffee etc., use a sponge soaked with soap-solution.
- For tougher stains like pickle, oil, grease, wax & oil crayons etc., use a sponge soaked with mineral turpentine.
- The early removal of stains gives better results.



### SAFETY FEATURES

Non-Flammable



### PACK SIZE

1 L., 4 L., 10 L. & 20 L.



### SHADE RANGE

As per Nerolac Colour Scapes Fandek & Shade Card



### SHELF LIFE

2 years from the date of manufacturing, when stored in the original tightly closed containers, away from direct sunlight and excessive heat.

## DISCLAIMER

The product information and application details given by the company has been provided in good faith and is meant to serve only as a general guideline during usage. The performance claims made are based on the tests carried out under controlled conditions and our past experience with the type of products. Therefore actual performance will depend on local factors prevailing at that point of time. Users are advised to carry-out sample tests by taking trials to ensure the suitability of products for their requirement prior to full-scale usage of our products.

The Company is not liable for factors beyond its control such as application during adverse climatic conditions, use of improper application tools/techniques and surface preparation, any structural defects or the inferior quality of materials other than paints. The warranty/guarantee clauses shall accordingly be amended.